


MDA HT Series

SMD Low Profile High Current Molded Inductor

Size 8054




FEATURES

- Low loss realized with low DCR.
- ΣΡύοτ ΡύΧ όΐαα ΩύΩσ\$ Σΐ\$ ύύ ΌύΨμύσά\$ ΌύΩσύóΐΌΓύΩ .
- 100% Lead(Pb)-Free and RoHS compliant.
- High performance (Isat) realized by metal dust core.
- !9/ v ξΐτΡάύ\$Σ.
- ημ\$οτΓ° ύ\$Ψμ\$οτύΐο\$ ύύ / ΩΩΌΡΐΣΩΩ° σ\$Ρύ ύ\$Ψμ\$οτύΐο\$ οάσ\$
- νΐτΩΓύbl t / {


APPLICATION

- Ι\$τ\$ΡτΨμσ ύτΩΡ ΡτΨμσ τΩ\$ ΩΩύ\$οάύο ΡΩ°ΓΓ°
- HVAC
- 5ύύοσ ΧΩΩ\$ύΧ ΡΩ~ τΩ\$ σ\$τύ ΌύΩύούΡ
- Audio subsystem
- Digital instrument cluster
- ΩΩ°ΓΩΌΡ\$ ΛΩύύύτΩΨ\$Ωύ τΩ\$ ΩτΦ° τΓύΩ

Dimensions: [mm]

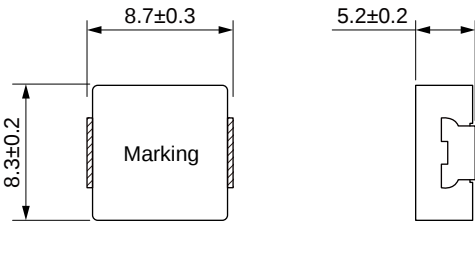

Land Pattern: [mm]

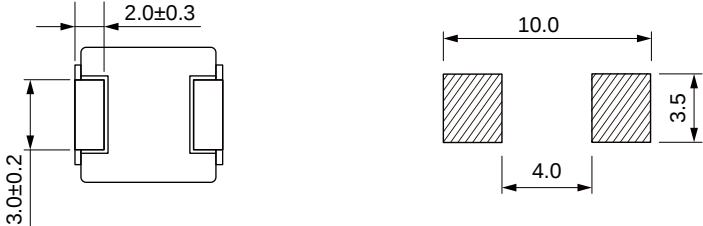

Electrical Properties:

	±20%	15.5	14.0	22.0	19.0	4.0	4.8
	±20%	14.5	13.0	18.0	15.5	6.5	7.8
	±20%	13.5	12.5	16.3	14.0	9.5	11.4
	±20%	11.0	10.0	12.0	11.0	13.0	15.6
	±20%	11.0	9.0	15.0	13.0	18.0	22.0
	±20%	7.8	6.8	9.0	7.7	29.0	35.0
	±20%	6.0	5.5	7.8	6.7	44.0	52.8
	±20%	5.5	5.0	7.2	6.2	56.0	67.0
	±20%	3.5	3.0	5.2	4.5	122	135

Typical Electrical Characteristics:




Soldering Reflow:

Preheat condition: 150 ~200℃ / 60~120 sec.
Allowed time above 217℃ : 60~150 sec.
Max temperature: 260℃ .
Allowed Reflow time: 2x max.P1


Packaging Information:

Tape Dimension :

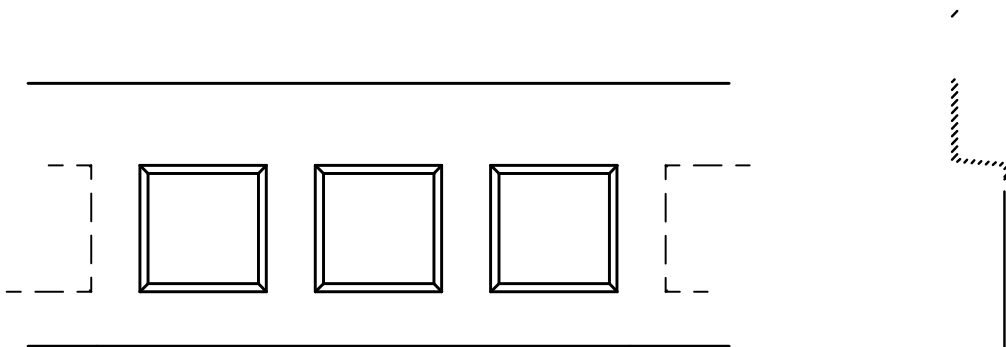


Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	T (mm)
MDA8054HT	8.9±0.1	9.0±0.1	1.5±0.1	4.0±0.1	16.0±0.1	24.0±0.3	5.9±0.1	0.40±0.05

Peel force of top cover tape:

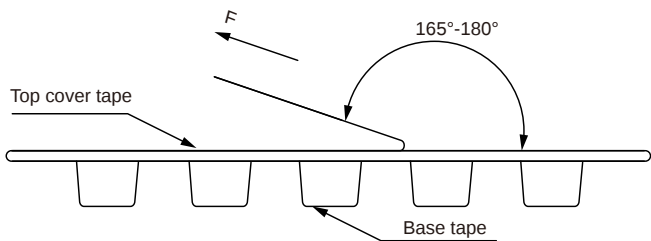


The peel force of top cover tapes shall be between 0.1 to 1.27 N

Reel Dimension: [mm]

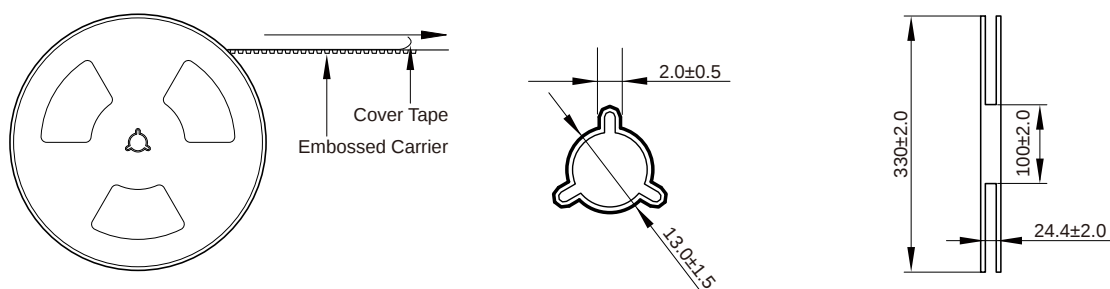

Packaging Quantity:

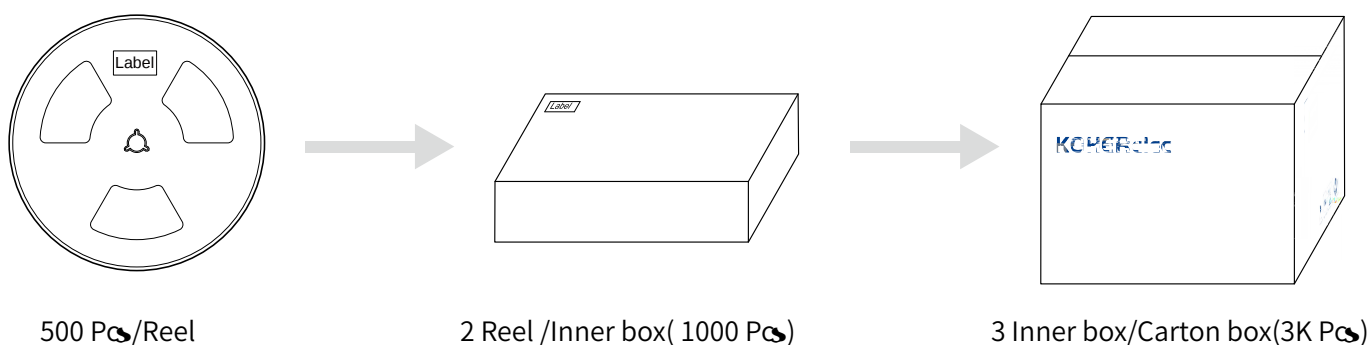

Cautions and Warnings:

Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does. As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.