




FBA Series



FEATURES







- E}• Œ μ Ÿ}v •}oμŸ}v (}Œ P v Œ o •}Pv o
- s Œ}}μ• (Œ <μ v Ç Z Œ š Œ}•Ÿ • Á}šZ î u
-]+ Œ v š (šμŒ • (}Œ }μv š Œu •μŒ • P
- šZ]vP (Œ}u P v Œ o •}Pv o • š} Z]PZr•%
- rŸîîî <μ o].
- K% Œ ŸvP š u% Œ šμŒ Wrññš} =íñîš

APPLICATION

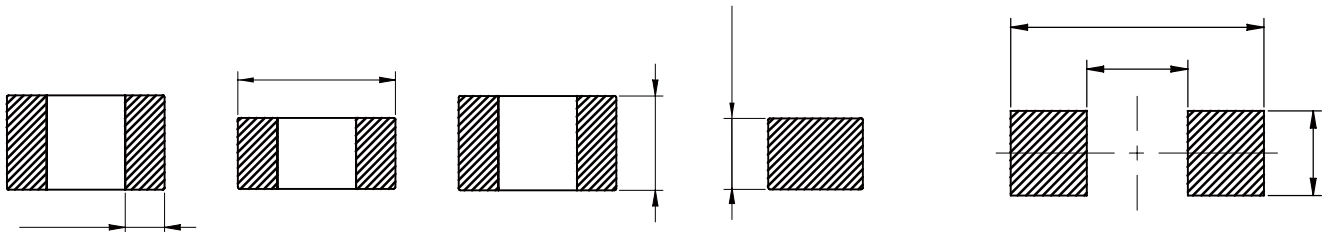


	Impedance @ 100MHz ()	DC Resistance Max. ()	Temperature Rise Current Max. (mA)
& îðîñrîîrðîíZ	íí		
& îðîñrîðîrðîíZ	íó		
& îðîñrîðîrðîíZ	îð		
& îðîñrîîrðîíZ	îî		
& îðîñrðîrðîíZ	ðî		
& îðîñrðîrðîíZ	òî		
& îðîñrîíîrðîíZ	íîî		
& îðîñrîñîrðîíZ	íñî		
& îðîñrîîrðîíZ	îîî		
& îðîñrðîíîrðîíZ	ðóî		
& îðîñrðîíîrðîíZ	òîî		
& îðîñrîîîrðîíZ	íîîî		
& îðîñrîîîrðîíZ	íîîî		
& îðîñrîñîrîñîíZ	íñîî		
& îðîñrîîîrîñîíZ	îîîî		
& îðîñrîîîrðîíZ	îîîî		



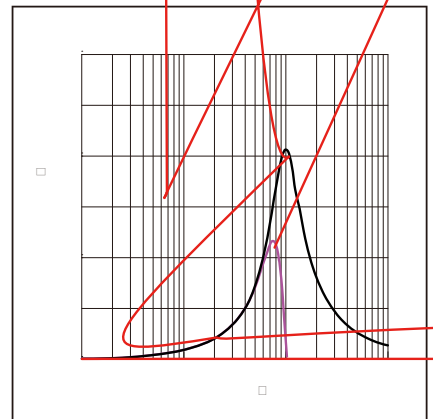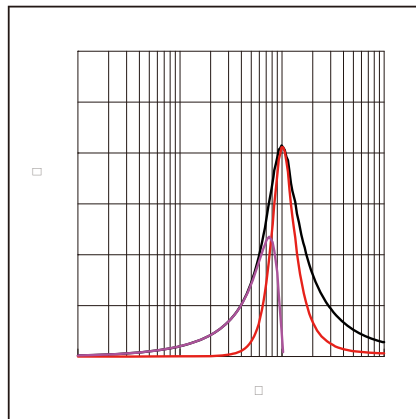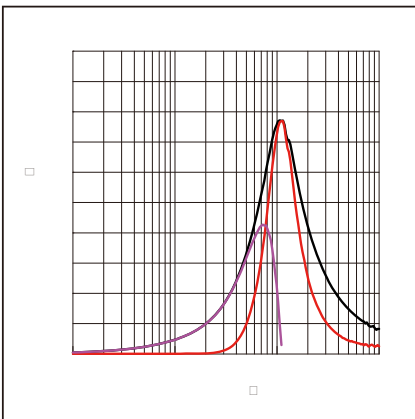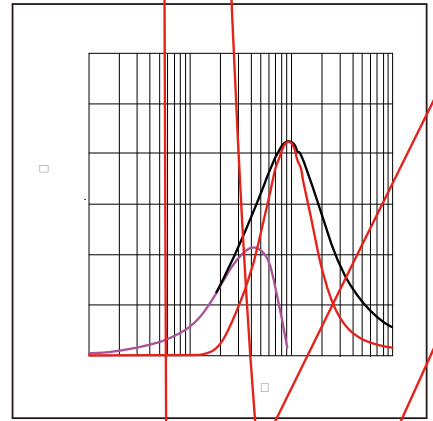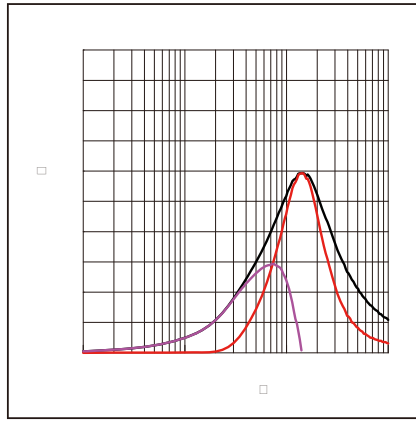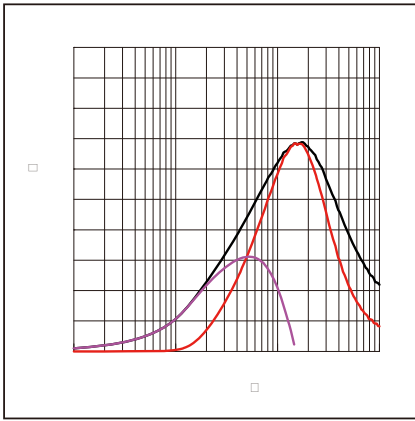





:

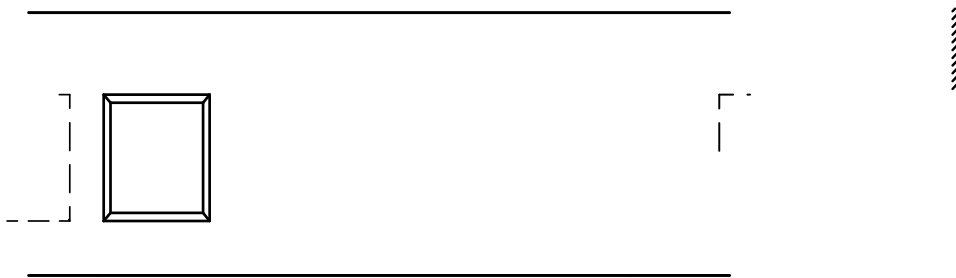

	□	□	□	□	□	□	□	□	□
0805	1.30±0.05	2.10±0.05	1.5±0.1	4.0±0.1	4.0±0.1	8.0±0.3	0.95±0.05	1.75±0.1	0.95±0.05

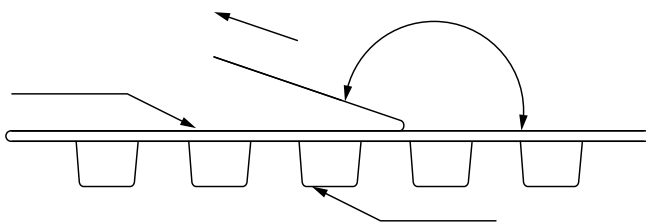

The peel force of top cover tape shall be between 0.14 to 0.58 N

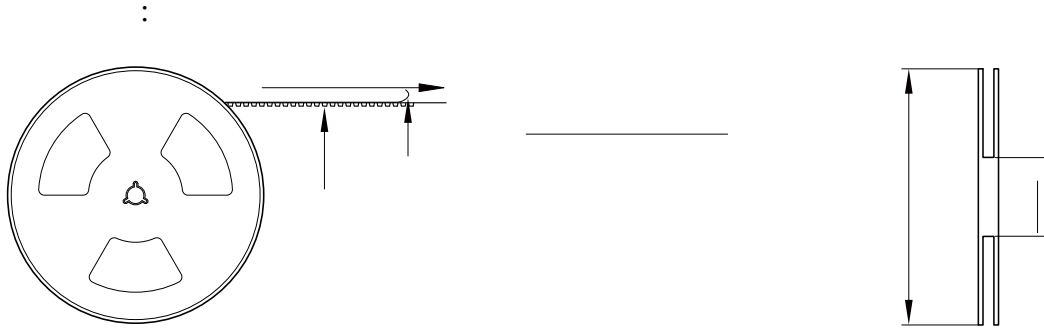

:

-
-
-
-
-
-
-
-
-

