




MDA Series

SMD Low Profile High Current Molded Inductor

Size 4020




FEATURES

- {K1StřŘŠŘ ŐzyăúNdzŐăzy
-
-
-
- ! túNl- f2đ đdzlî y2łăŠŤ ŘdzŠ ú2 Ő2YŁJ2ăłŮŠ ŐzyăúNdzŐăzy
-
- ! 9/πvнлл ljdzt-łŮŠŘ
- hŁJŠNl-ăyĐ úŠYŁJŠNl-údzNŠY πpp ú2 ħmpp c / ólyŐfdzŘlyĐăŠŤfπúŠYŁJŠNl-údzNŠ NłăăŠú
- v dzl-yăúăY оллл t / {


APPLICATION

- I Šl-Řfl-YŁăă úl-łł fl-YŁăă l-yŘ lyúŠNł2N łăĖKăyĐ
-
- 522Năă đlyŘ2đ łlĐ l-yŘăŠl-ú ŐzyúN2f
-
-
- Lyπ±ŠKłŐfŠ Lyf2úl-l-yYŠyú l-yŘ ył-đłĐl-ăzy

Dimensions: [mm]

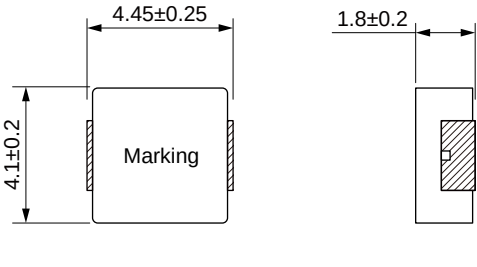


Land Pattern: [mm]

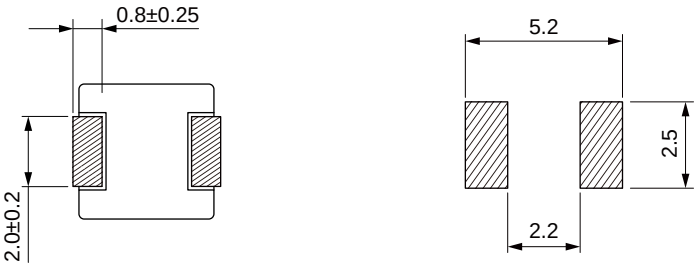

Electrical Properties:


	mpł
	płp
	płH
	πłp
	ŐłM

Typical Electrical Characteristics:

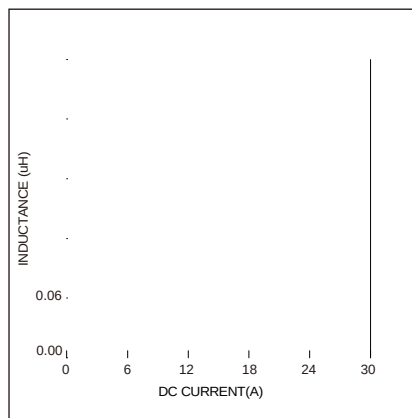


MDA1001-5BPM


KOHER Electronics
F9, No. 4188, Huaning Rd, Minhang District, Shanghai
021-34753361 Contact@kohergroup.com

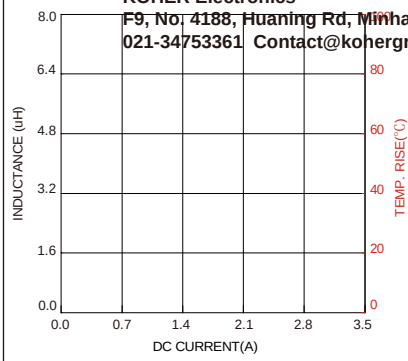

Reel Dimension : [mm]

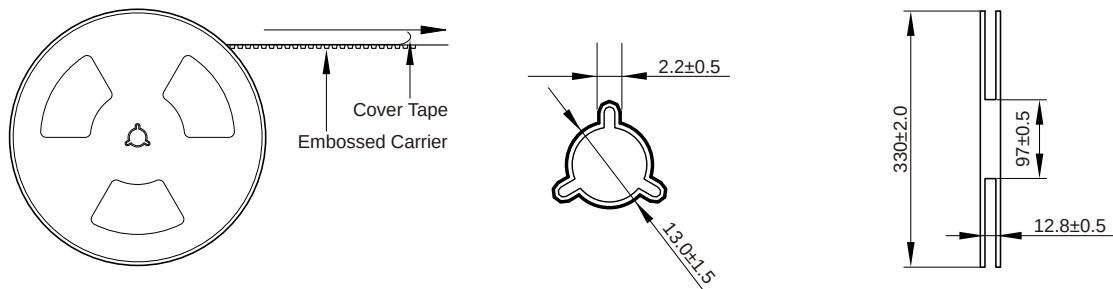

Packaging Quantity:

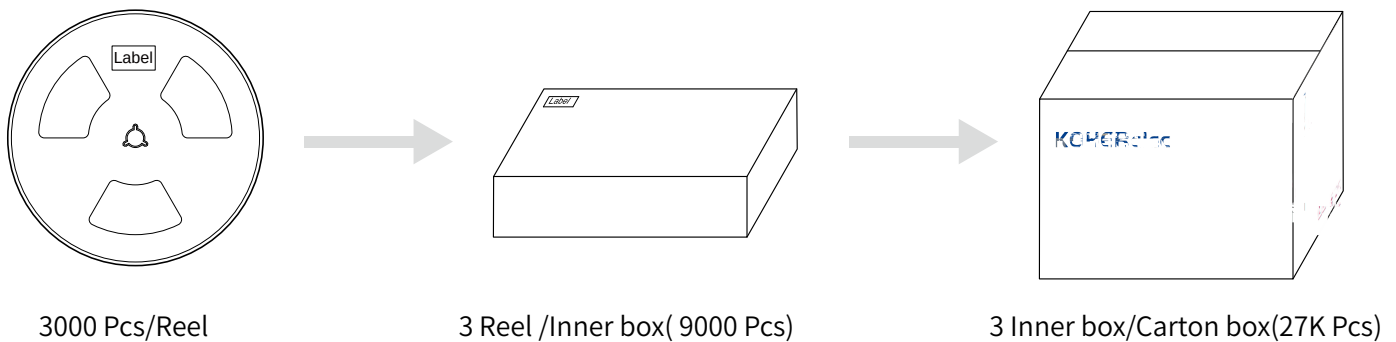

Cautions and Warnings:

Storage Conditions :

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max).If the storage period elapses, the soldering of the terminal electrodes may deteriorate.The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components.The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does.As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.