


MDE Series
Molding Power Inductors
Size 252012S



FEATURES



- High saturation current realized by material properties and structure design.
- Low DC resistance to achieve high conversion efficiency and lower temperature rising.
- Low Profile.
- Magnetically shielded structure to accomplish high resolution in EMC protection.
- Halogen free, Lead Free, RoHS Compliance.

Part No.			
252012S-0.100000	0.10		
252012S-0.150000	0.15		

APPLICATION



- Generic in portable DC to DC converter line.
- Smart phone, PAD
- DC/DC converter
- Thin-type power supply module.

Dimensions: [mm]




Land Pattern: [mm]

Electrical Properties:

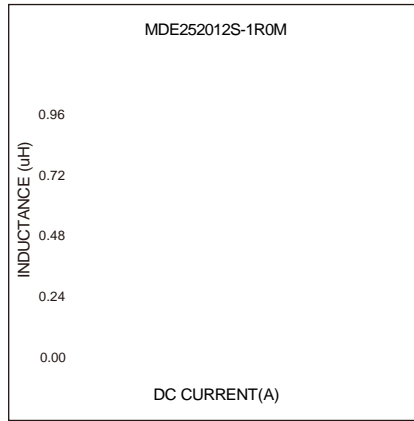

Reel Dimension: [mm]

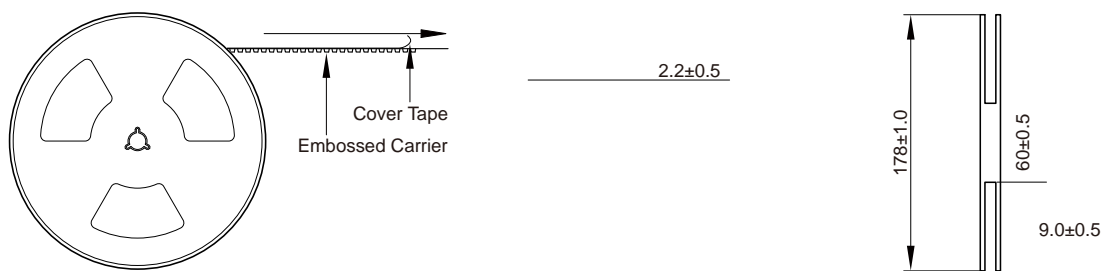

Packaging Quantity: